



### Infrared Receiver Module IRM-56384 Datasheet



Pin Configuration

1. Vout
2. GND
3. Vcc

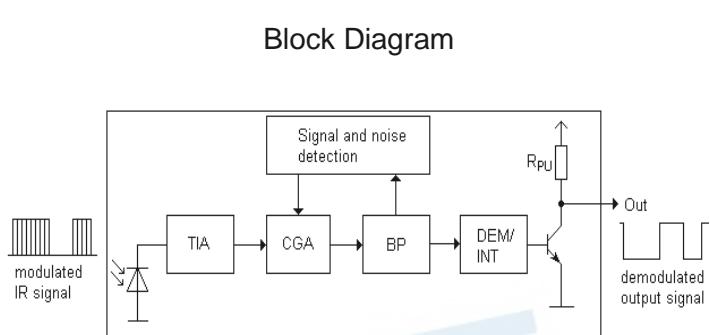

#### Features

- High protection ability against EMI
- Circular lens to improve the receive characteristic
- Low voltage
- High immunity against ambient light
- Photodiode with integrated circuit
- Long reception distance
- High sensitivity
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free( $Br < 900ppm$ ,  $Cl < 900ppm$ ,  $Br+Cl < 1500ppm$ )

#### Description

The IRM-56384 device is miniature type infrared remote control system receiver which has been developed and designed by utilizing the most updated IC technology.


The PIN diode and preamplifier are assembled on lead frame, the epoxy package is designed as an IR filter.

The demodulated output signal can directly be decoded by a microprocessor.

## Applications

- AV equipment such as TV, VCR, DVD, CD, MD, etc.
- Toy applications
- CATV set top boxes
- Multi-media Equipment

## Application Circuit

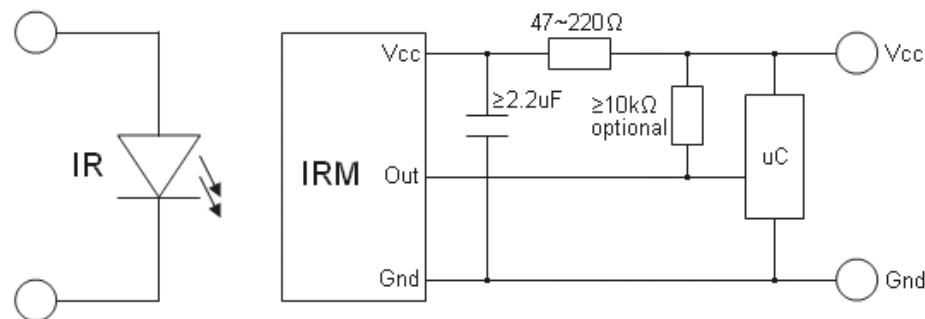

RC Filter should be connected closely between Vcc pin and GND pin.

## Parts Table

Model No.	Carrier Frequency
IRM-56384	38 kHz

## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ ) <sup>\*1</sup>

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	6	V
Operating Temperature	Topr	-20 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +85	°C
Soldering Temperature <sup>*2</sup>	Tsol	260	°C

<sup>\*1</sup> Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document.

Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability

<sup>\*2</sup> 4mm from mold body for less than 5 seconds

## Electro-Optical Characteristics ( $T_A=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max	Unit	Condition
Current consumption	Icc	---	---	2.0	mA	Vcc=3.0V
Supply voltage	Vcc	2.7	---	5.5	V	
Peak wavelength	$\lambda_p$	---	940	---	nm	
Reception range	$L_0$	14	---	---	m	See chapter , Test method <sup>*3</sup>
	$L_{45}$	6	---	---		
Half angle(horizontal)	$\Phi_h$	---	$\pm 35$	---	deg	
Half angle(vertical)	$\Phi_v$	---	$\pm 35$	---	deg	
High level pulse width	$T_H$	400	---	800	μs	Test signal according to figure 1 <sup>*4</sup>
Low level pulse width	$T_L$	400	---	800	μs	
High level output voltage	$V_{OH}$	Vcc-0.4	---	---	V	
Low level output voltage	$V_{OL}$	---	0.2	0.5	V	

<sup>\*3</sup> The ray receiving surface at a vertex and relation to the ray axis in the range of  $\theta=0^\circ$  and  $\theta=45^\circ$ .

<sup>\*4</sup> A range from 30cm to the arrival distance. Average value of 50 pulses.

## Test method

The specified electro-optical characteristics are valid under the following conditions.


1. Measurement environment  
A place without extreme light reflections.

2. External light  
The environment contains an ordinary, white fluorescent lamp without high frequency modulation. The color temperature is 2856K and the illumination at the IR receiver is less than 10 Lux ( $E_v \leq 10\text{Lux}$ ).

3. Standard transmitter  
The test transmitter is calibrated by using the circuit shown in Figure 2. The radiation intensity of the transmitter is adjusted until  $V_o = 400\text{mVp-p}$ . Both the test transmitter and the photo diode have the peak wavelength of 940nm. The photo diode for calibration is PD438B ( $\lambda_p = 940\text{nm}$ ,  $V_r = 5\text{V}$ ).

4. The measurement system is shown in Fig.-3

Fig.-1 Transmitter Wave Form

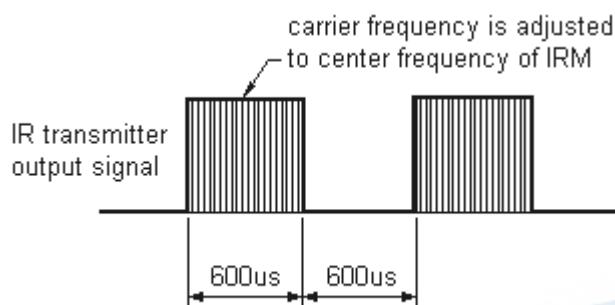

D.U.T output Pulse

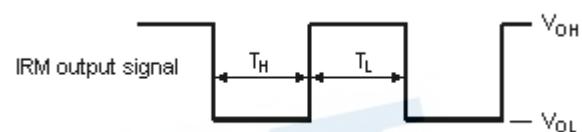


Fig.-2 Standard transmitter calibration


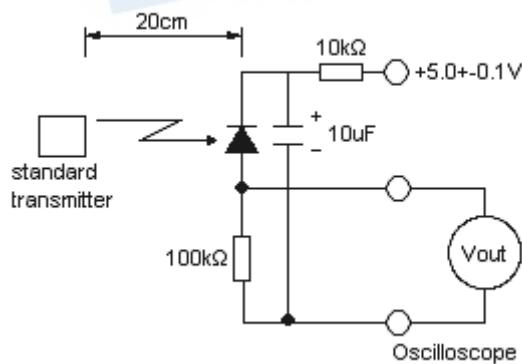


Fig.-3 Measuring System

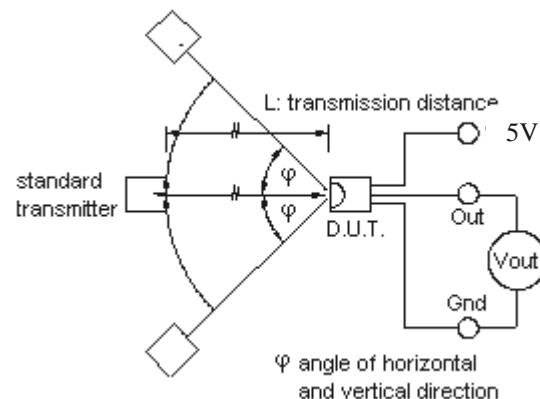

## Typical Electro-Optical Characteristics Curves

Fig.4 Relative Responsivity vs. Wavelength

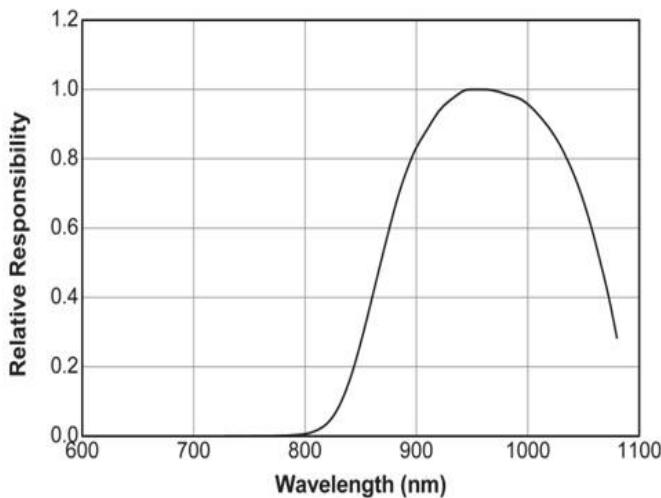


Fig.5 Relative Sensitivity vs. Angle

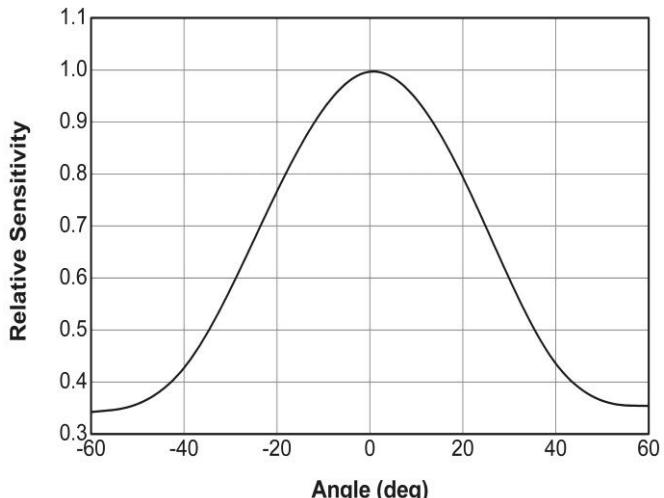


Fig.-6 Output Pulse Width vs. Transmission Distance

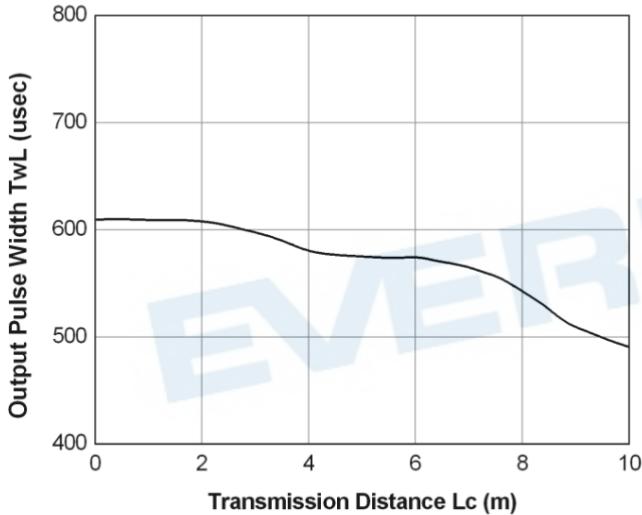


Fig.-7 Relative Transmission Distance vs. Supply Voltage



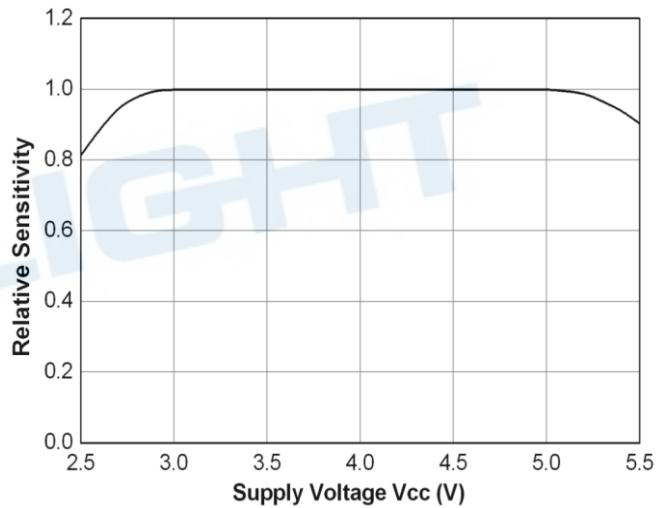


Fig.8 Relative Transmission Distance vs. Carrier Frequency

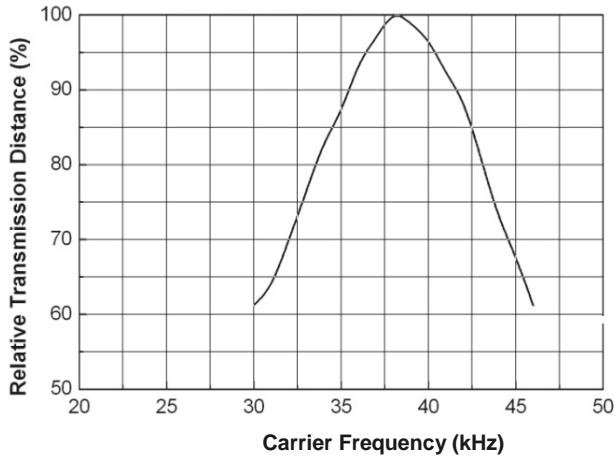

## Device Marking

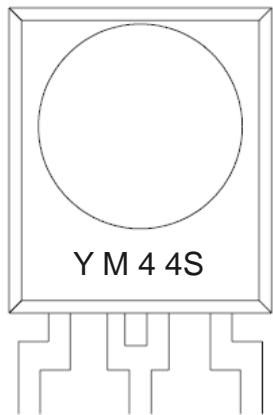


### Note:

Y denotes date code  
M denotes date code  
4 denotes frequency  
4S denotes model type

## Packing Quantity

1500 pcs / Box  
10 Boxes / Carton

**Package Dimensions**  
(Dimensions in mm)

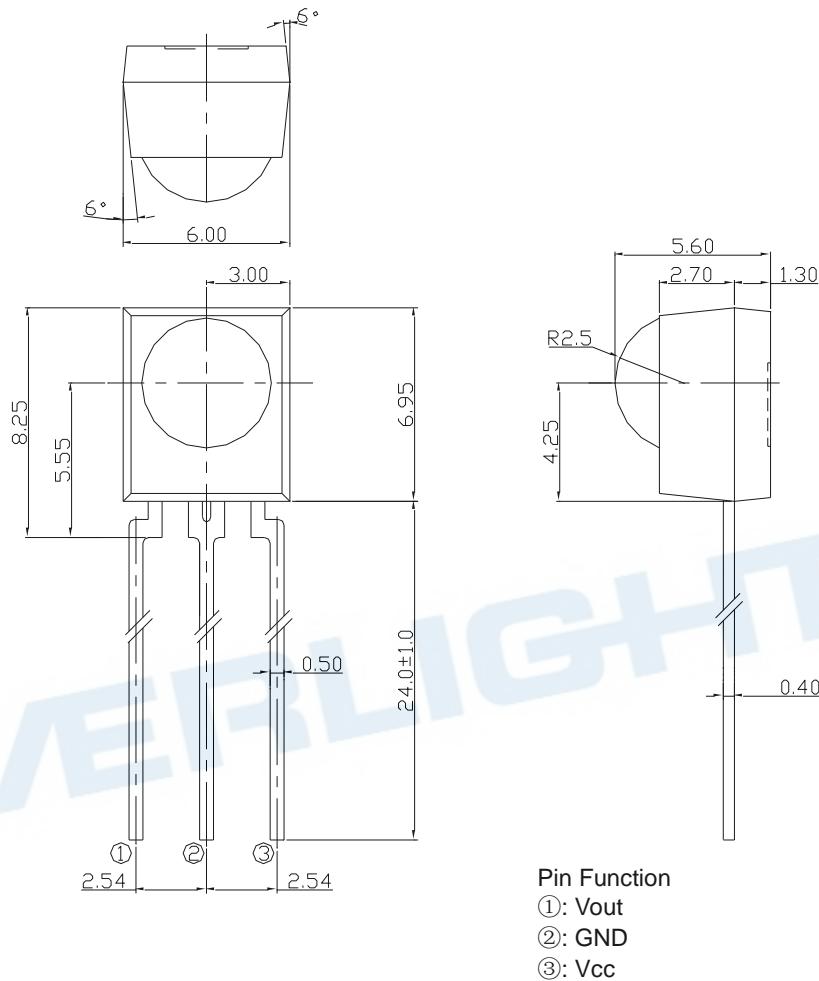

Notes: 1. All dimensions are in millimeters.  
2. Tolerances unless dimensions  $\pm 0.5$ mm.

## DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification and reserve the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
7. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.