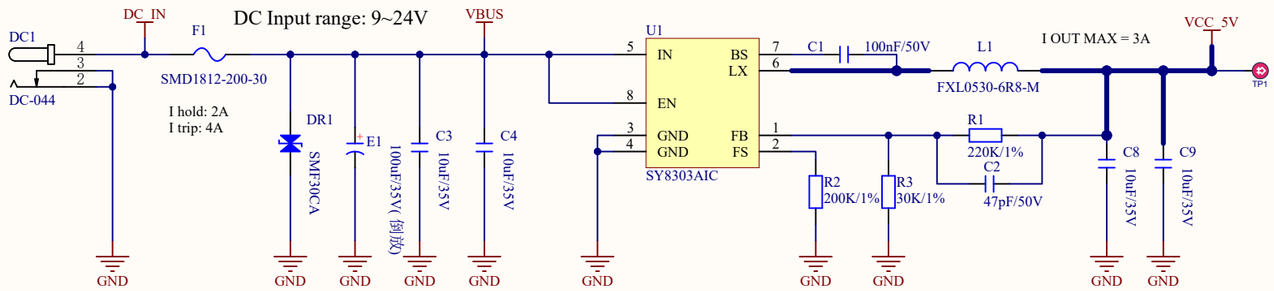

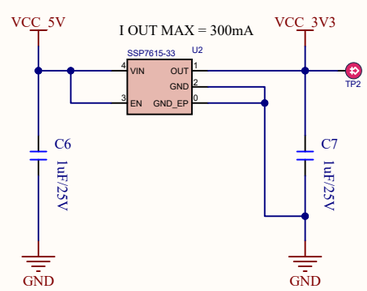



Vout = 0.6(1+(RH/RL))=5.0V

Chain interface: IN **Chain direction** OUT

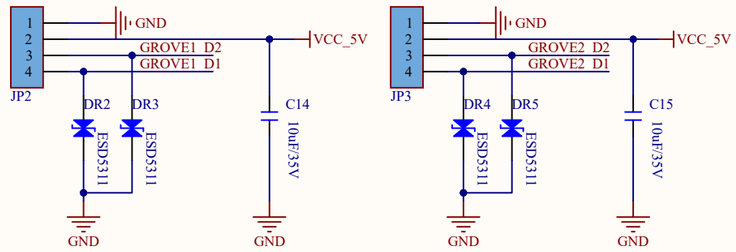

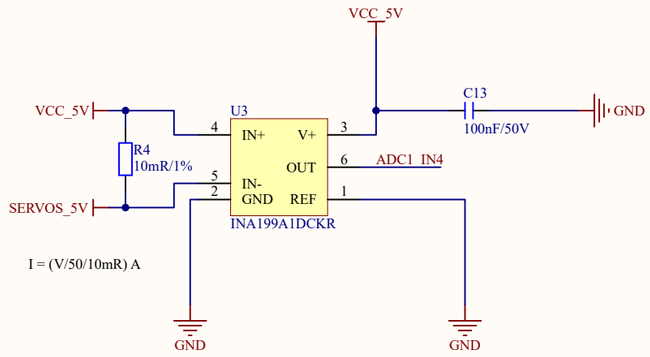



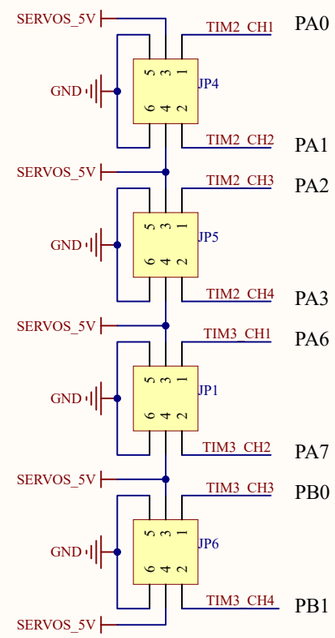



Design Note:
PB7 and PB6 Pin can be configured as USART1 and I2C1
PB7: SDA / RX1
PB6: SCL / TX1

Unit interface;R8,R9=0R, R10,R11=NC;
Chain interface:R8,R9=NC, R10,R11=0R;

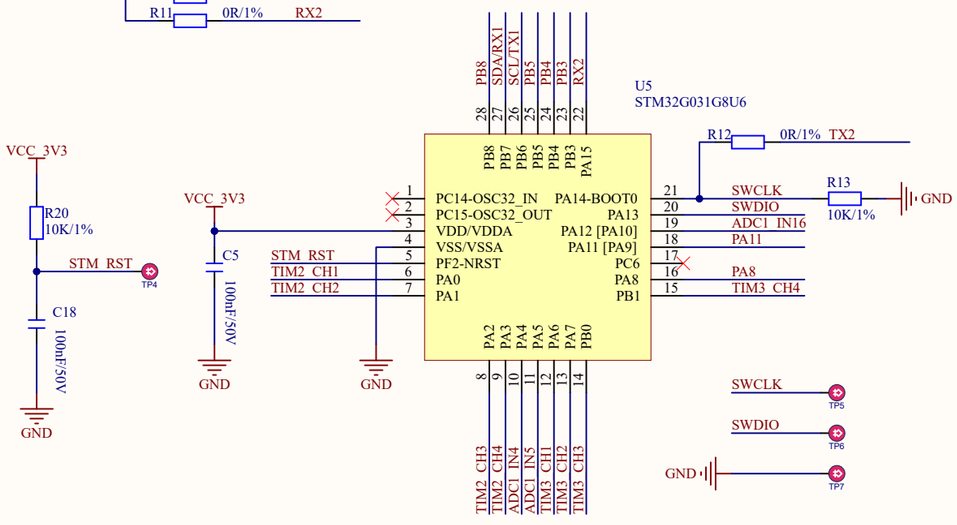

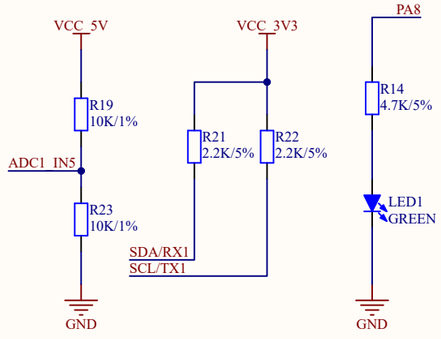

Design Note:
The 16-bit encoder sets the IIC from the device address

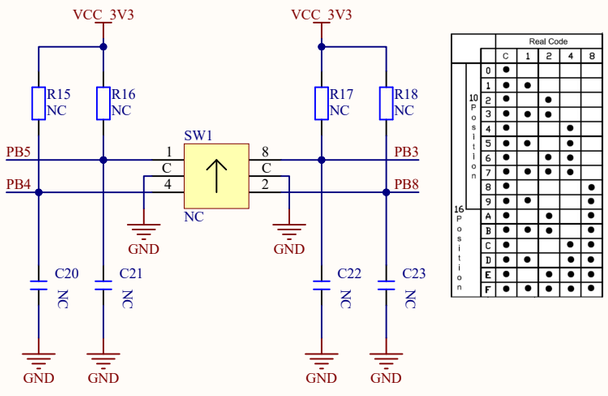

Title		
Size: A3	Number	Revision
Date: 5/26/2026		Sheet of
File: D:\Desktop\..\02 Unit 8Servos2.SchDoc		Drawn By: